


Footfall insulation underlay

DURAL

TECHNICAL DATA SHEET (Concise version):

Product:	Footfall insulation underlay SW 875-130
Manufacturer:	Dural GmbH & Co. KG, D-56403 Montabaur
Application:	Insulates the sound of footfall when installed underneath tiled floors
Improvement due to insulation:	15 dB as per DIN EN ISO 140-8 *)
Width of roll:	100 cm
Length of roll:	15 m (= 15 m ²)
Thickness of underlay matting:	1.5 mm
Colour of mats:	Top, light grey / bottom, dark grey
Loading capacity:	2.0 KN / m ²
Material properties:	Allows diffusion of vapour / does not decay
Adhesive for underlay:	Flexible mortar conforming to DIN EN 12004 C2
Adhesive for tiles:	Flexible mortar conforming to DIN EN 12004 C2
Size of tiles:	from 20 x 20 cm

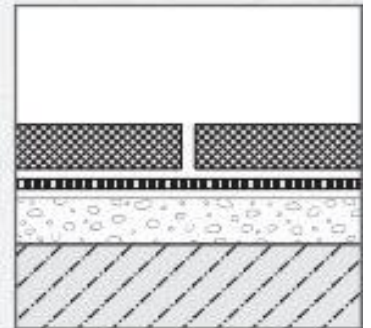

*) Differing results for effectiveness of insulation may arise depending on construction of ceilings, method of installation, thin-bed mortar and tile thickness

Note: This is a preliminary version of this data sheet.

Montabaur, 21.01. 2010

STONE CONCEPT HOLDINGS P/L

3/179-183 Woodpark Road,
Smithfield, NSW, 2164

Tel. +61 (02) 9757 3880

Fax +61 (02) 9818 5073

products@stoneconcept.com.au

www.stoneconcept.com.au